

cable pulling systems



fiberglass duct rodders


Ø4,5mm, Ø6mm, Ø9mm, Ø11mm for industrial usage, construction works, underground telecommunication cables, power cables and fiber optic cables





Fiberglass duct rodders are excellent drivers for long distances. The special composition of the rod offers bigger stability under high compressive and shear stress. The outer coating of polypropylene (PP) provides higher flexibility, penetration and resistance to time and wear.



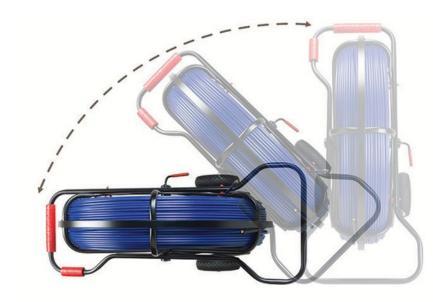





40-200mm PIPE DIAMETER





1050-7500kg BREAKING STRENGTH



170-500kg PULLING STRENGTH

*technical specifications vary according to size and type of rod

Metallic reel of ergonomic design: a) facilitating usage when lifting, carrying and laying down the duct rodder b) operating in both horizontal and vertical position.



for more

cable drum handling

cable drum lifter and rollers pair













*technical specifications vary according to size and type of system

Set of drum roller bases. It is composed of [2] separated roller bases, easing drum handling with no limit on its width.



for more



metallic rollers in black electrostatic powder coating









*technical specifications vary according to type of roller



Cable rollers offer safety and ease cable laying process. They reduce friction and protect cables and pulling equipment. Cable rollers are suitable for long distances, heavy loads, and complex ground conditions (corners). They are made of steel in black electrostatic powder coating.



cable lubricants/ chemical products

cable lubricants and silicone insulation gel for electrical junction boxes





NON-TOXIO



NON-FLAMMABLE



*technical specifications vary according to type of chemical product




Cable lubricants reduce friction up to 80%, ease the pulling process and protect cables from wear during laying. Silicone gel is ideal material for electrical insulation of junction boxes. It protects cables and electrical connections from high-impact environmental conditions (humidity, dust).




evik cable pulling grips

cable grips Ø10-180mm with single or double eyelet, closed or open mesh of high tensile galvanized wire rope

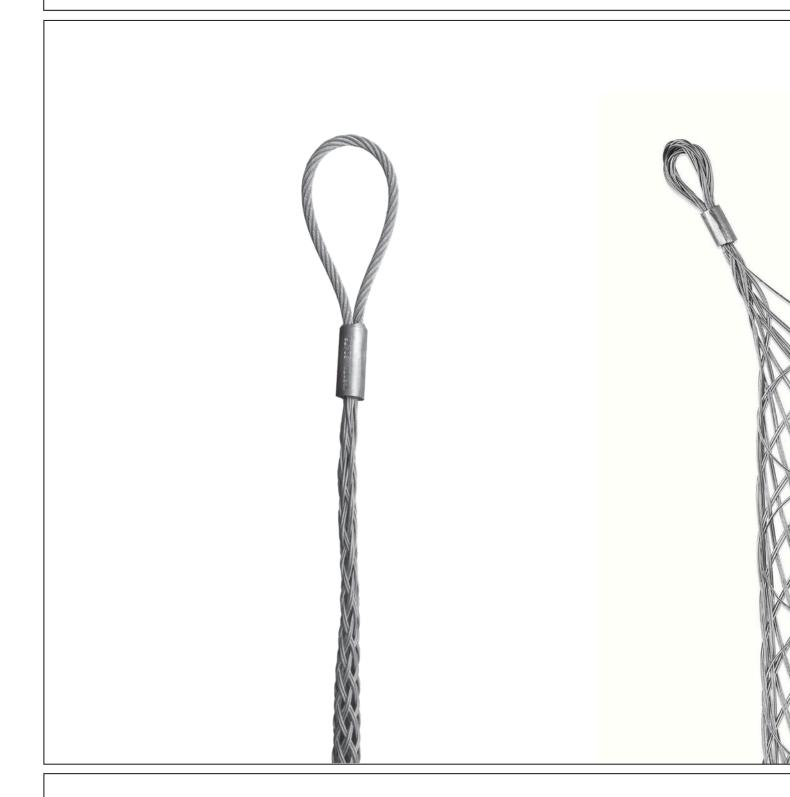











1040-15000 kg BREAKING STRENGTH



*technical specifications vary according to size

The professional passes the cable/es into the mesh when pulling, the cable grip cuddles cables tightly along the whole length of the mesh. Pressed ferrules, which are appropriately formed, ease the penetration and provide safety in cable pulling. More than one cable can be pulled simultaneously by tying them with insulation tape.



for more

polyester fish tapes

3 strand wire, Ø4mm, Ø5mm, Ø6mm, Ø7mm for domestic and industrial usage, with fixed and interchangeable terminals





Polyester fish tapes are excellent solution for pipes up to Ø63mm and longer distances up to 100m. The special braid of "3 strand wire" offers excellent penetration, especially in installations of high complexity (corners) and high pulling strength up to 400kg.





20-100mm MIN. BENDING RADIUS



ømax.25-63mm PIPE DIAMETER





180-450kg BREAKING STRENGTH



150-400kg PULLING STRENGTH

*technical specifications vary according to size

Available in various professional solutions for quick and easy usage, transfer and storage.



for more

EVIK kit of sticks

kit of basalt sticks Ø4,6mm, Ø5,6mm, Ø6,6mm for plasterboards and gypsum ceilings





Basalt kit is ideal tool where there are no pipes for cable installation such as plasterboards and gypsum ceilings. The mechanical properties of basalt provide sticks of high flexibility, and at the same time hardness and stability under high compressive stress, making them unbreakable. Kit offers a complete professional solution with a variety of accessories for every possible kind of work.





90-220mm MIN. BENDING RADIUS















*technical specifications vary according to size

Set of 10pcs in different diameters with a variety of metallic accessories, for usage according to the work of the professional.

Customised options of kit may be available according to request.





Ø3mm & Ø4mm for domestic usage, with fixed and interchangeable terminals







ømax. 16-32mm PIPE DIAMETER







max. 180kg PULLING STRENGTH

*technical specifications vary according to size and diameter



Nylon fish tapes are the ideal tool for distances up to 30m and pipe diameter up to Ø23mm. The top quality nylon PA offers excellent penetration as well as great resistance to time and wear.



accessories & complementary products

Complete range of metallic accessories for all ranges of fish tapes, duct rodders and sticks



repair kit for fiberglass duct rodders



fiberglass rod length counter device



eyelet





eyelet



rotter



repair kit



shackle



snackte



rotating joint connections



eyetet



pulling grip



anti-torsion joint



starting/ending joint



connecting joint



end joint




anti-torsion joint



Accessories and complementary products are available for all evik product ranges facilitating the technician's work and providing maintenance as well as possibility of self service repair at the working area.



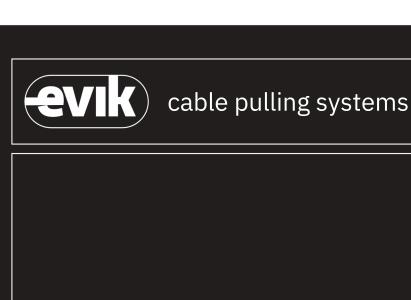

EVIK

Leof. Flemingk 35 & Evropis 1, Ag. Ioannis Rentis, 18233, Athens Tel. +30 216 7005131 Email. info@evik.gr





facebook







youtube

instagram